


Surveyed by J. J. Peyton County Surveyor Jan. the 7 1854 corners from 1 to 3 set.

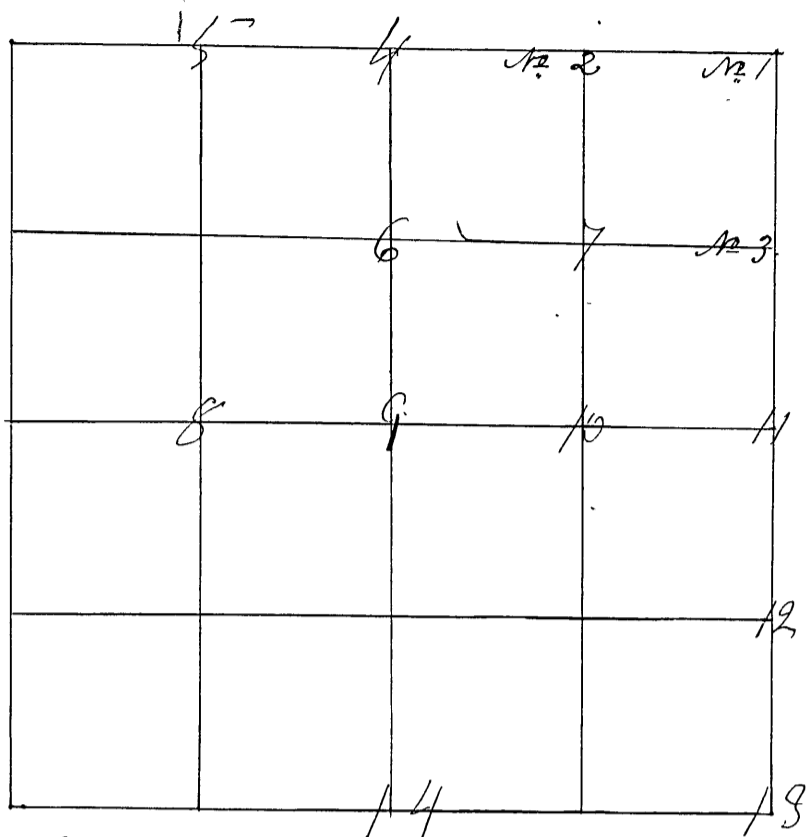

Corner No 1 corner of S 1 and 2 on T. line

- " Elm 20 S 50 W 76. Sand stones placed
- " No 15 S 55 E 50. at all the corners
- " No 2 1/4 mile N. of No 1 and marked as re-
- " W. Oak 24 N. 75 W. 56 quired by Law
- " Dogwood 5 S. 61 E. 16 1/2. Chain bearers and mar-
- " No 3 1/4 mile S. of No 1. ker used. Bearings
- " N. Oak 24 N. 45 E 23. taken at 5° w. variation
- " N. Walnut 4 S 75 E. 24.

Resurveyed June the 7 1869 by W. B. Criss & Co after due notice being given corners set 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15.

- Cor No 4 Sand Stone 30 in long N 1/4 S set middle north line
- " " 5 Sand Stone 18 in long N 1/6 set middle N line & way
- " " " Beech 10 N 42 W 40 lks
- " " 6 S. S. 24 in long N 1/6 center of N 1/2
- " " " a Beech 30 S 55 E 48 links
- " " 7 Sand Stone 18 in long N 1/6 center N. E q.
- " " " B Sun 14 S 38 E 25
- " " " Sassafras 6 N 73 W 6
- " " 8 Sand Stone 12 in long N 1/2 set center of N 1/2
- " " " Walnut 6 N 69 1/2 E 65 lks
- " " 9 center of sec sand stone 24 in long N 1/4
- " " " Sand Stone 12 in long S 55 E 18
- " " 10 center of West 1/2 Sand Stone 18 in long N 1/6
- " " " Poplar 7 N 82 1/2 W 45
- " " " Elm 8 N 8 E 5-2 1/2