


61

SECTION *Nine (9)* , TOWNSHIP *Ten (10)*

Surveyed by John Peyton County Surveyor S. C. Parties present. Bearings taken & variations

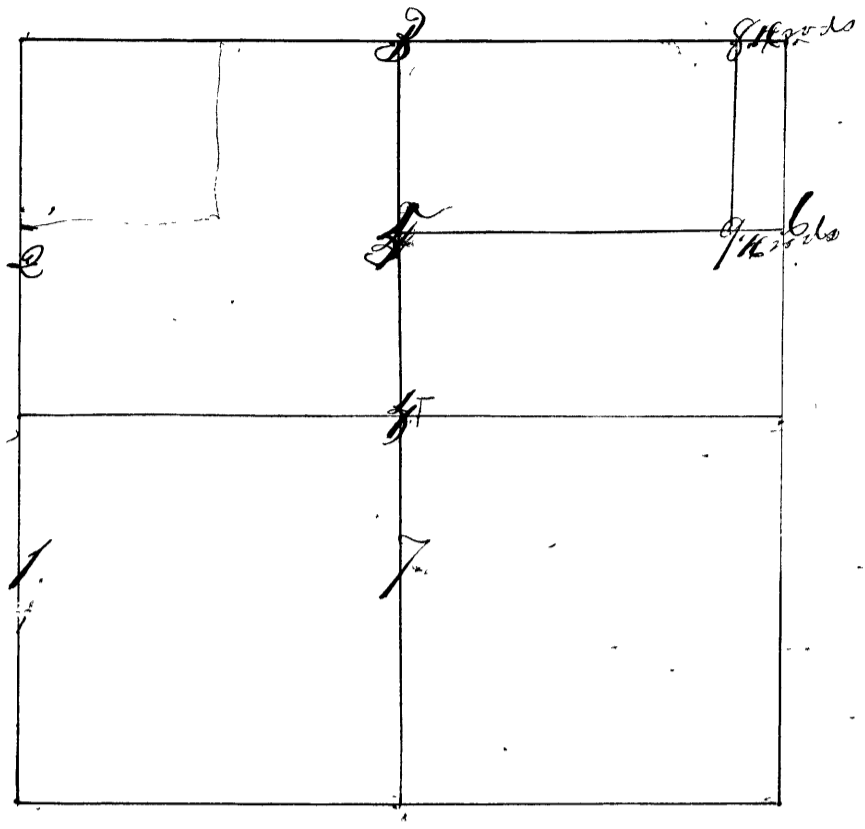

Corner No 1 On Section line 9 & 1/3 Poles North of the S.W. corner of Section
 " " Flint Stone marked N.W. & S.W.
 " " J. Oak 7 N 70 E 43 S
 " " 57 S 41 E 63 "
 Corner No 2 90 Poles South N.W. corner Flint Stone marked N.W. & S.W.
 Hickory 6 N 60 E 37 S,
 Beech 20 N 62 W 31 1/2 "

Further surveyed by Homer Hicks Surveyor S. C. Ind. March 10 & 11, 1873, Corners set from 3 to 9.

Chain courses run on as law directs

Corner No 3, a Sand Stone 12 in long. marked 1/4 S
 " " 4 Hickory 20 N. 67 E. 77 lbs.
 " " 1 Beech 20 N. 58 W. 73 "
 Corner " 4. a Sand Stone marked 1/4 S
 " " 1 W. Oak Stump 48, S. 53 E. 39 lbs.
 " " 1 Beech 20 N. 33 E. 64 "
 Corner No 5. Sand Stone marked 1/8 S
 " " 1 W. Oak 42 N 79 W 35 lbs.
 " " 1 Beech 18 E 10 "
~~Corner No 6 Reset "Lime Stone West 125 lbs
 " " 1 Sand Stone marked 1/4 S
 " " 1 J. Oak 10 N. 78 E 48 lbs.
 " " 1 " 10 S. 70 W 81 "~~
 Corner No 7 Sand Stone unmarked. 15, 44 1/2 ch S. of Center Sec.
 " " 1 W. Oak 36 N. 56 W 59 lbs.