


Surveyed by J. H. Davis S. L. L. May 22<sup>d</sup> & 23<sup>rd</sup> 1860 & corners set jointly by Wm Sanders and F. M. McMullough ch-ear, next day & Oliver Clark & J. L. Since 2<sup>nd</sup> day survey made by consent of parties

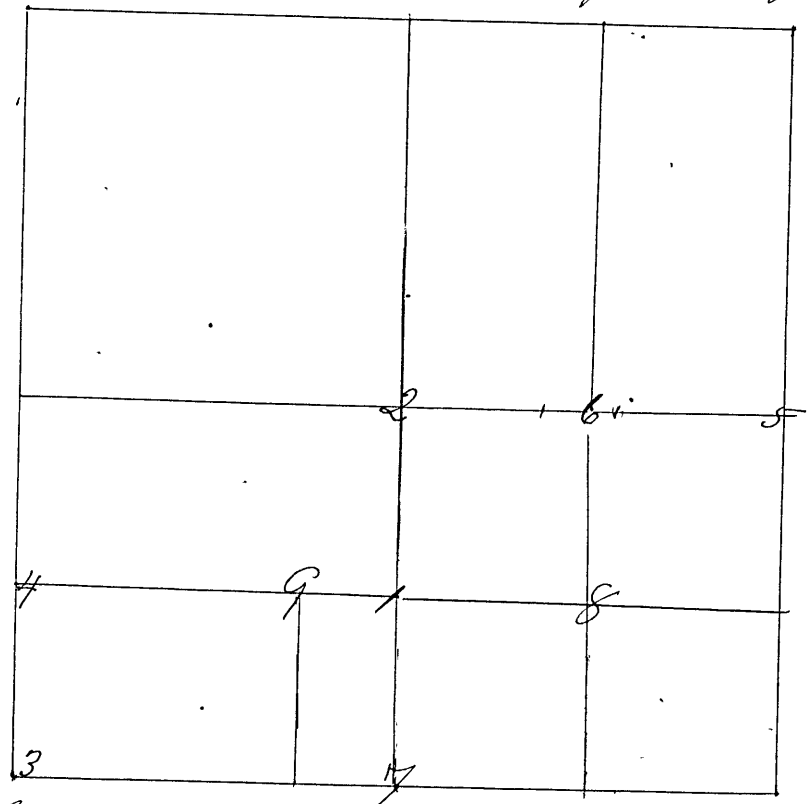

- Cor. No. 1 S. Stone
- " " " Jack Oak 10 N 9 E 25 fks.
- " " " Ash 10 N 50.30 W 8 1/4 fks.
- " " 2 S Stone 14 S
- " " " Lime Stone 10 in long South 16 fks.
- " " " Sand Stone 12 North 16 fks.
- " " 3 S. Stone Sec. 13, 14, 23, & 24
- " " (original bearings) S Stone 20 in long S 51 E 30 fks.
- " " found ) W 8 Stone 18 " " N 51 W 30 "
- " " 4 S. Stone 30 in long 1/8 S.
- " " " S Stone 16 in long East 25 fks.
- " " " do, do, 20 " " S 41 W 25 "
- " " 5 Sand Stone 14 S T 12
- " " (original bearings) S. Stone 12 in long N 53 E 24 fks
- " " found ) do, do, 14 " " S 47 W 24 "
- " " 6 Sand Stone 16 in long
- " " " S. Stone 8 in long East 25 fks
- " " " do, do, 10 " " West 30 "
- " " 7 Sand Stone 12 mi cor. on S side 1/4 S.
- " " (original bearings) Sand Stone 16 in long N 8 W 21 1/2 fks
- " " found ) do, do, 16 " " S 10 E 23 "
- " " 8 Set to agreement in center of S E Sand Stone with
- " " Marvin B. Bess Oct 18 1869 and also by
- 11 " 9 Sand Stone 1/2 40 R W of No 1) M. B. Bess S, E, C