


Surveyed by J. W. Davis Co. Surveyor February 13th 14th 15th 1860 and corner set from to 15

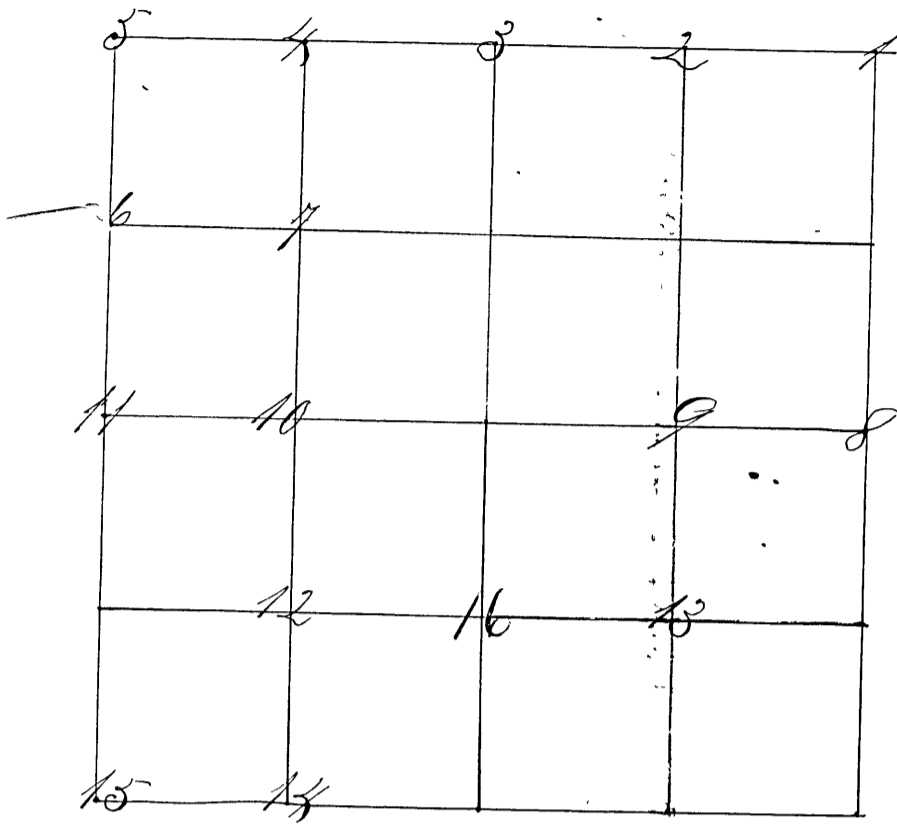

- Cor. No. 1. Sand Stone marked S 23. S 24. S 25. S 26.
- " " " Flint Stone 12 in long N 36 W 23 3/4 S.
- " " " S. Stone 11 in long T S 36 E 23 3/4 Sks
- " " 2 Sand Stone
- " " " W. Oak 24 S 5 E 129 Sks.
- " " " W Oak 22 N 28 E 131 "
- " " 3 S. Stone 1/4 S 1/2 mile cor. on N side
- " " " "Niggerhead" x N 11 E 6 9/2 Sks.
- " " " S. Stone South 25 Links
- " " 4 S. Stone
- " " " (W) S. Stone N 6 W 39 Links
- " " " S. Stone S 1° 30' W 35 "
- " " 5 S Stone marked S 22 S 23 S 26 S 27.
- " " " 2 Sand Stone S 53 E 38 Sks
- " " " W Oak 30 S 35° 30' W 114 Sks.
- " " 6 S. Stone
- " " " Sweet Gum S 69° 30' E 27 3/4 S.
- " " " Elm 10 S 54° 30' W 39 1/4 S.
- " " 7 Sand Stone
- " " " W Oak 30 S 39 W 35 Sks.
- " " " do. 20 N 18 W 48 "
- " " 8 Sand Stone 1/4 S, 1/2 mi cor. on E side
- " " " W Oak 40 S 50 E 112 Sks.
- " " " Beech 24 N 1 W 52 "
- " " 9 Sand Stone
- " " " W Oak 30 S 25 E 56 Sks
- " " " W. Oak 24 N 39 E 57 1/2 Sks.