


SECTION *Four, 34,* TOWNSHIP *Twelve, 12,*

Corner No 1 set by John H. Davis March 14th 1861, Jan. 12th 1861th
1860 corners 2, 3, 4, 5, 6 & 7 set by John H. Davis

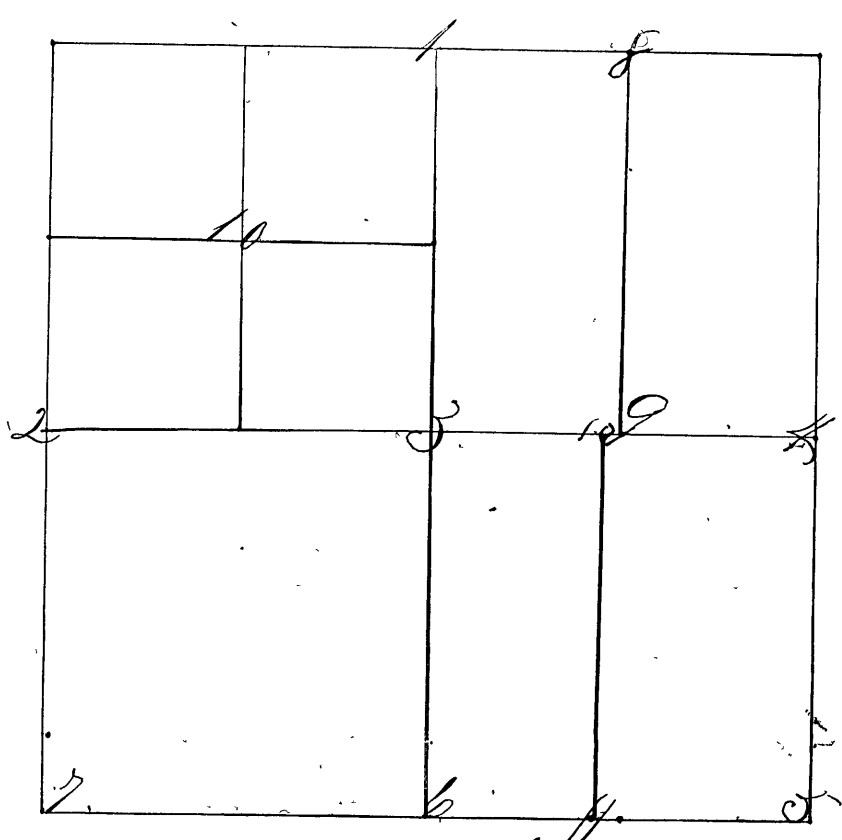

- Cor No 1 1/2 mi cov. on N side Sand Stone 1/4 S
 " " " Nit, Burr Oak 15 N 7 E 27 Sks.
 " " " Original Bearings found,
 " " " J. H. Davis S. C. C.
- Cor " 2 Sand Stone 1/4 S 1/2 mi cov on N side
 " " " W. Oak 24 N 55 W 5 3/4 Sks.
 " " " Jack Oak 10 S 86 E 102 "
- " " 3 Sand Stone center Sec.
 " " " W. Oak 24 N 61 E 11 Sks
 " " " Jack. - 10 S 34 W 34 1/2 "
- " " 4 Sand Stone 24 in long 1/4 S
 " " " Red Oak 24 N 58 E 5 2/4 Sks
 " " " W Oak 30 S 62 E 75 1/2 "
- " " 5 S Stone 18 in long T 12 S 35 S 34.
 " " " W. Oak 30 N 36:50 W 80 Sks. &
 " " " Sand Stone 12 S 1'30 E 34 Sks
- " " 6 Sand Stone 26 in long T 12 1/4 S S side
 " " " S. Stone 14 in North 30 Sks.
- " " 7 Sand Stone. S 34 S 33 T 12
 " " " W. Oak 24 S 33 E 111 Sks dist.
- " " Further surveyed by Peter J. Luther Surveyor March 31st 1868
 " " and corners 8, 9 & 10 set by consent of parties.
- Cor. " 8 1/4 mi E. of 1 a Sand Stone 31 on 1/8 S 34
 " " " a white Oak 30 N 20 E 73 Sks,
 " " " a do 8 N 30 W 73 "