


Surveyed by George V. Goshorn C.S. commenced Nov. 28 & finished Dec. 2 1865 chain carriers sworn according to Law and corners set from 1 To 14. Parties inside of Sec. consenting & on North line

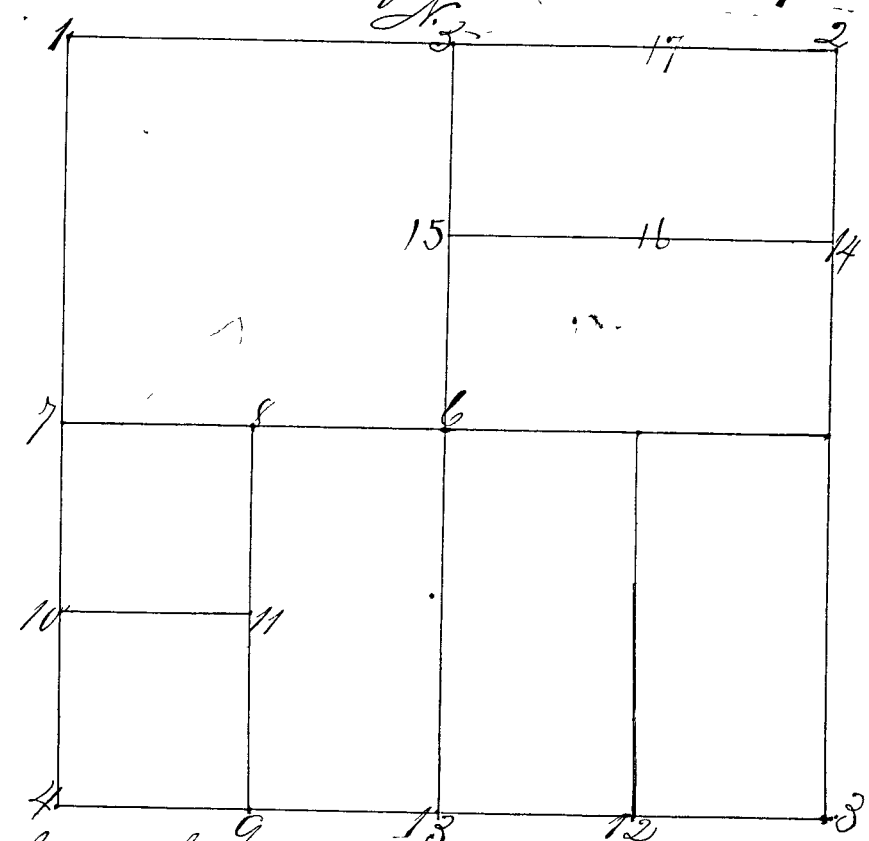

- Cor. 1 Sand Stone marked S 25, 26. Original bearing <sup>supposed to be found</sup> stump <sup>collected</sup> <sup>tree</sup>
  - " " Aple tree 1 in S 46 E 28 Sks.
  - " " Red Oak - N 83 E 3 1/2 Sks
- Cor. 2 set by running straight line 1/2 m north & 1/2 mile south equi dist set sand
  - " " Stone marked S 25, 24,
  - " " Sugar 20 N 89 W 22 1/2 Sks
- Cor. 3 S. E. cor. of Sec. 25 - set sand Stone m. R 6, S 25, 26
  - " " Beech 15 - N 43 W 59 Sks
  - " " Do 15 - S 60 W 59 1/2 "
- Cor. 4 set by dividing the distance north & south from original corners
  - " " and dividing east & west from original corners sandstone marked S 25
  - " " N. Oak 40 N 46 E 30 1/2 Sks
  - " " (A) Poplar 40 S 46 W 97 Sks.
- See next page -> Cor. 5 S 1/2 m cor. of Sec. 24 not found set on straight line from 1 to 2 at
  - " " Equi dist. S.S. m 74 S.
  - " " N. Oak 15 - S 47 E 23 Sks.
  - " " Ash 15 - S 73 W 60 Sks.
- Cor. 6. end of Sec. 25 sand Stone m 74 S.
  - " " Sugar 30 N 15 1/2 E 24 Sks
  - " " Beech 20 N 70 W 34 "
- Cor. 7 sand Stone m 74 S. Original stumps found
- Cor. 8 cor. N line S W 1/4 S Stone m 74 S.
  - " " Beech 15 - N 7 1/2 E 117 Sks.
  - " " Do 20 N 5 1/2 E 111 "
- Cor. 9 cor S line S W 1/4 Sand Stone m 74
  - " " Sugar 30 N 17 W 48 Sks
  - " " Beech 20 N 12 W 50 Sks.