


Surveyed by John H. Davis S. C. C. August 26th to 29th 1862 and corners set from No 1 to 14 by Cyrus Reeves & Eli Leiver sworn as ch-carriers

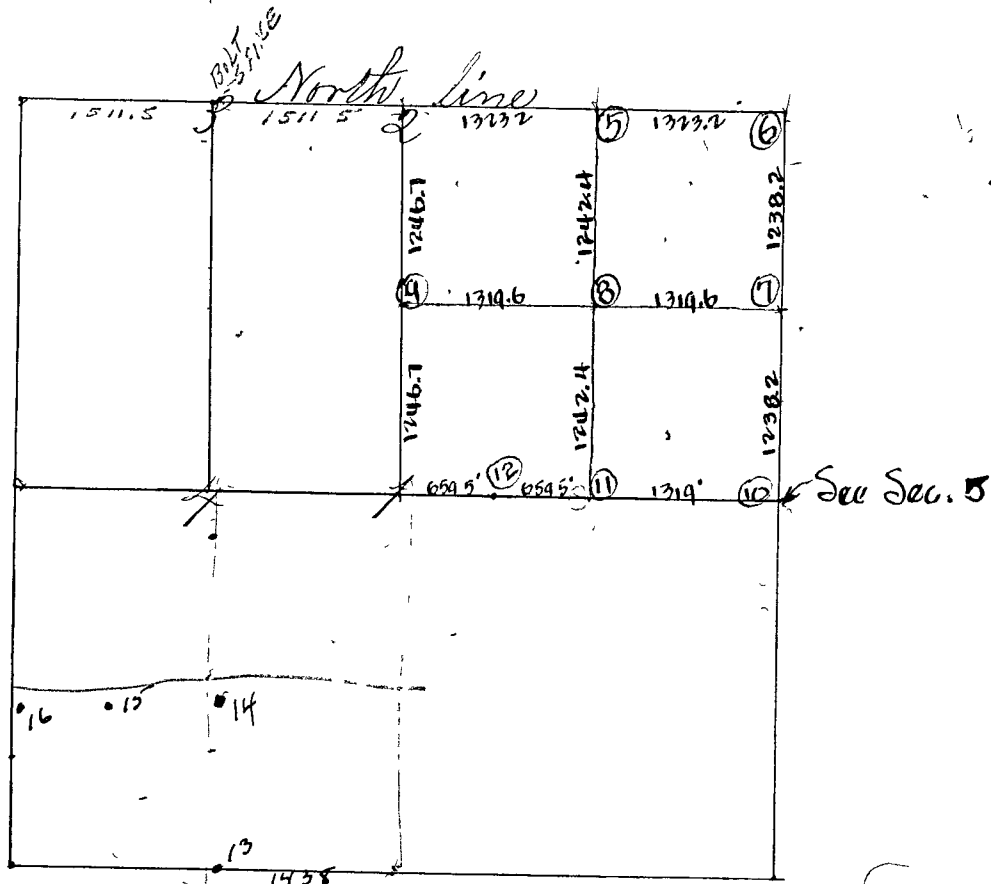

- Cor. No 1 "Grey Lime Stone" 1/4 S center sec.
- " " " " No trees near
- Cor " 2 Sand Stone 1/4 S 1/2 mi cor on N side
- " " " " 58 Lks West of 1/2 mile corner on South side sec. 31 T13 R7
- " " 3 Lime Stone T12
- " " " " Blk Walnut 58 8 ft 7 3/4 Lks.
- " " 4 "Bastard" Lime Stone
- " " " " Beech 14 N 52 W 15 links dist.

Further Surveyed Mar. 9-11-14-1866, by Wm. P. Koehler, Dep. Surveyor Clay Co. at the request of M. D. West, after 10 days legal notice. Walter Jucker, Chairman, duly sworn.

- Cor. #5. Iron Rod 1" x 24". No witness. at 1/2 distance from 2 to 6.
- Cor. #6. Sandstone 14" x 12" x 8". No Witness. N.E. Corner of Section
- Cor. #7. Railroad Iron Rail - 4'-6" long. No Witness - at 1/2 distance from 6 to 10.
- Cor. #8 Granite Boulder - 15" x 15" x 8". No Witness. at 1/2 distance from 7 to 9.
- Cor. #9. Flat iron Bar 1 1/4" x 36". No Witness. at 1/2 distance from 1 to 2.
- Cor. #10. A Burnt Rock 12" x 15" x 4". Iron Rod under stone. at 1/2 distance from 1 to 10
- Cor. #12 A 1/2" Iron Rod - 24" x 1/2". At 1/2 distance from 1 to 11.

Further surveyed Feb 5-6-1930 by O. J. Jenkins Surveyor Clay Co. at the request of Gene Maxey and Otto Morris the interested parties

- Cor. #13 a stake set 1438 feet west of S.E. cor. of S.E. 1/4 - S.W. 1/4 Sect 6 - T. 12 N. R. 7 W.
- Cor. #14 a Lime stone 8" x 12" x 15" set 1068 feet N. 3° E. from Cor. #13
- Cor. #15 a Higger head 6' x 6" x 12" set midway between 14 & 16
- Cor. #16 a Limestone set 1067' N. of S.W. Cor. of section and east in fence Row