SECTION Ten (10), TOWNSHIP Nine (9)

Surveyed by John H. Davis Surveyor of Clay Co. Indiana, Surveyed Nov. 1st & 2nd 1860 and corners set from No. 1 to No 15-

North Line Sec 10 T 9 R 6

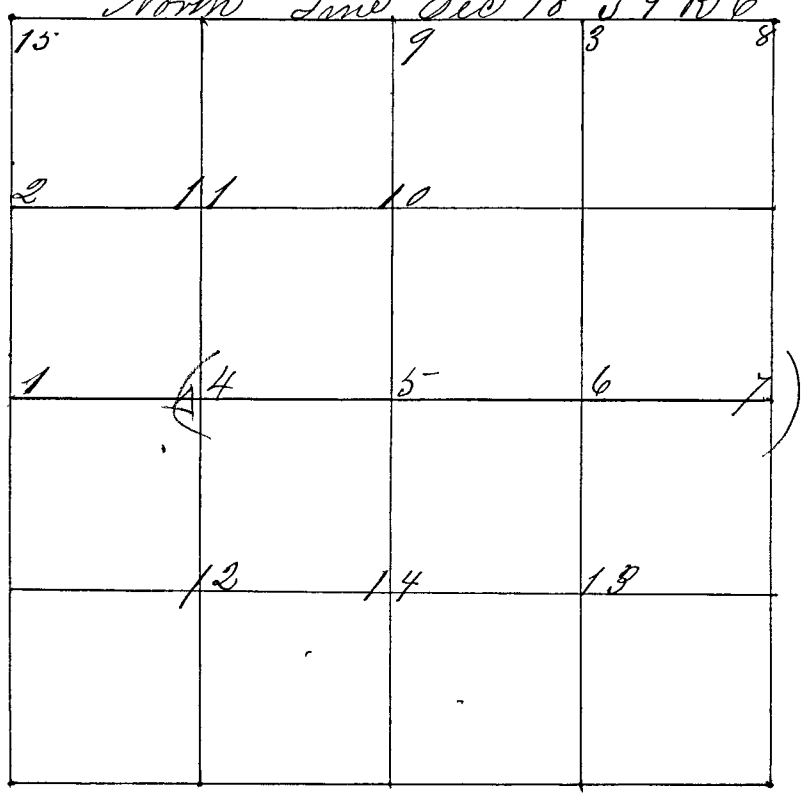

Corner 1 Sand Stone Marked 1/4 S

" " Sassafras 1 S 28 W 5 6½ lks

" " & " Original bearing found

" 2 Sand Stone

" " Sycamore 4 S 45' 30 E 5 2 "

" " & Do 5 S 70 E 60¾ "

" 3 Sand Stone 1/8 S

" " Hickory 10 S 40 W 73¾ "

" 4 Sand Stone 1/8 S

" " Sugar 16 N 5 0 W 30¼ "

" 5 Sand Stone 1/4 S

" " Hickory 15 S 39 E 28 " dist.

" " W. Oak 8 N 25 W 37 " "

" 6 Sand Stone 1/8 S.

" " R. Oak 20 N 40 W 31¼ " "

" " W. Oak 40 S 39 E 31 " "

" 7 Sand Stone 1/4 S

" " Hickory 16 N 12 E 77 " "

" " R. Oak 16 N 63 W 69¼ " "

" 8 S. Stone marked S 2. 3. 10. 11. Original W Oak W 4 L

" " W. Oak 18 N 74 E 95 3/4 " "

" " Do Do 24 S 18 E 5 6/4 " "

Cor No 9 Sand Stone marked 1/4 S.

" " " S Stone S 19 W 9 lks dist

" " " " " S 81 E 18½ " "

" " 10 Sand Stone 1/8 S – W Oak 30 S 29 W 28¼ " "