278

SECTION Seventeen (17), TOWNSHIP Ten (10),

Surveyed by P. T. Luther Surveyor of Clay County September 4th 5= 1867. corners established from one to twenty-five and lines perpetuated, all parties interested Present and consenting to the survey. Chain-carriers, axman and flagman all sworn as the Law directs. N & S lines run at 4, 10 var. E & W at 4, 30 Bearings taken at 4° 30'.

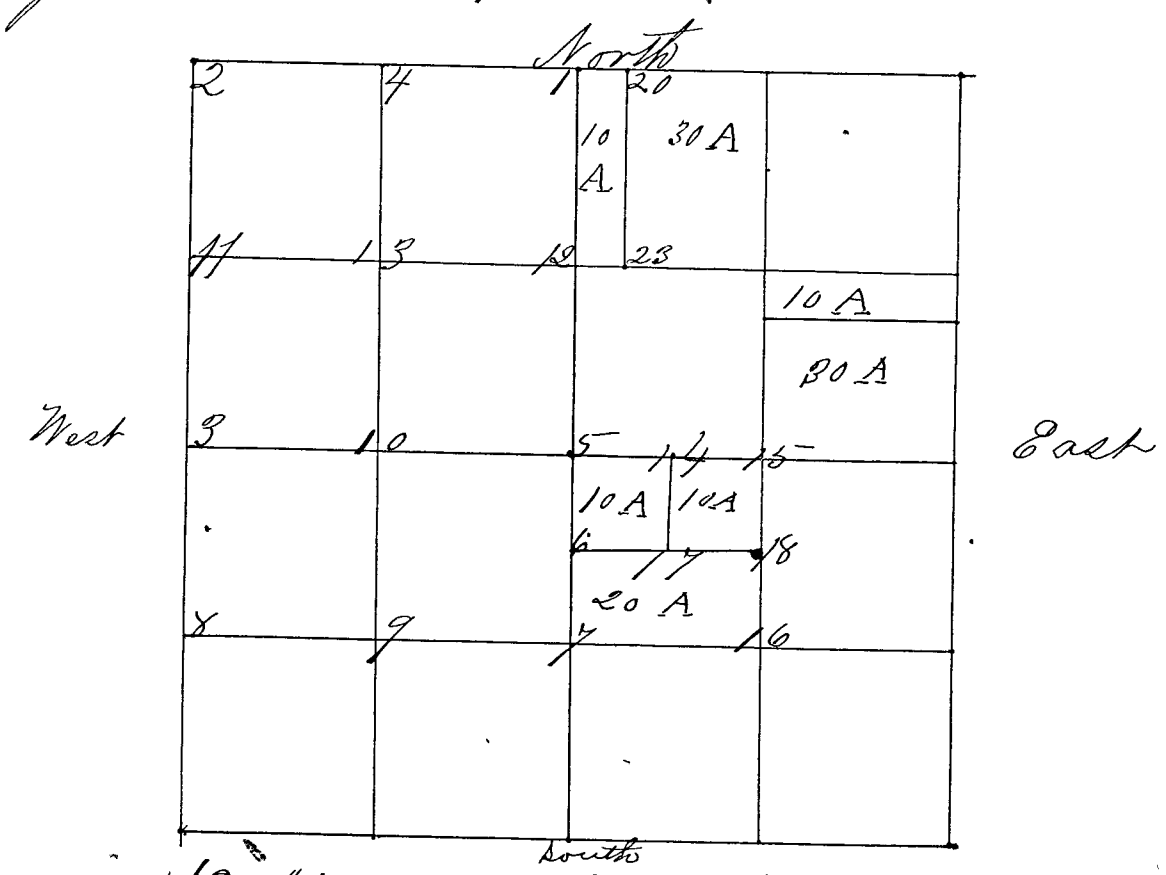

Cor 1 N 1/2 M cor. "O.B." found a Sand Stone 2 cov No 1/4
" " "Orig." Elm 10 S 75- W 8 lks
" " a Mulberry 6 S 2 E 8 "
Cor 2 N.W. cor "O.B." found a Sand Stone 14 M. 17. 18. 7. 8
" " "Orig" Elm 15- N 60 E 11 "
" " a Jack Oak 12 S 42 1/2 W. 28 "
Cor 3 N 1/2 M. cor. "O. B." found a S Stone 20 M 1/2 17
" " "Orig" Hickory 10 N 10 E 8 "
" " a Black Walnut 12 S 24 E 5- 8 1/2 "
Cor. 4 a. S. S. 13 M 1/4.
" " an Elm 7 S 31 E 18 1/2 "
" " a Sweet Gum 12 N. 26 1/2 W 16 "
Cor. 5 a S. Stone 16 cov of Sec M S 17 "
" " a Black Walnut 5- S 11 W. 97 "
" " a Poplar 60 S 47 E 80 "
Cor 6 Forty "Rods" S of 5 a S & S 17 M X.
" " a White Oak 40 N 55 W 61 "
" " a Beech 15- N 5-8 E 5-1 "
Cor 7 a Sand Stone 22 M 1/4
" " a Sweet Gum 9 S 5-1/2 W. 36 "
" " a Black Walnut 12 N 73 W 69
Cor 8 a Sand Stone 14 M 1/4 { a Beech 24 N 5-6 E 21/2 "