√480

SECTION 33 TOWNSHIP 13

Surveyed by M. McBride Surveyor Clay Co. Ind March 21st A.D. 1871.
after notice being served by reading 10 days before commencement of said survey
on John L. Stephens & Nancy Bowlin and ~~after~~ by the consent of Armstrong Heirs
& Samuel Graves. done at the request Thomas J. Keightley

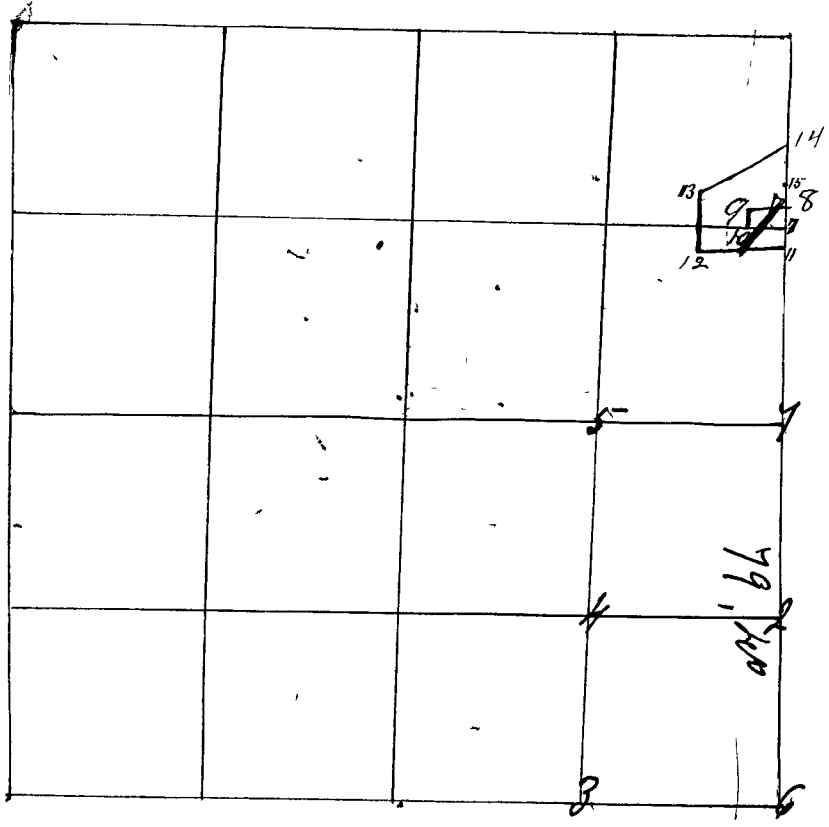

Cor No 1 Sand Stone Marked 1/4 center Elm in section / Poplar 14 A 19½ E 27
" " " two Sand Stone set mrs so Mks
" " 2 Middle Elm in S.E. qr. in Bar of cinders mixed with iron 36 in long
" " 3 Middle Elm in S.E. qr Stake drove in the roots of a Sugar tree
" " " on South side. 8 Lks West of 1/16 cor Sec 4 T 12 R 8 Middle Elm in S.E. qr
" " 4 Stone no lines near, set center of S.E. qr.
" " 5 Meander of E½ Sand Stone no 1/16
" " 6 S.E. corner of section Sand Stone m 38 & 34, East / cor of Sec 34 & 3
M. McBride Surveyor C.C.
" " 7 Middle of E. line of the N.E. qr. Lime Stone 13×17 in Mr. E ⅛
Set by Thomas B. Robertson Surveyor of Clay Co. Ind. by
request of John Hendrix and consent of parties interested chain
and flagmen sworn as the law requires — May — 2" 1883
Further surveyed by Thomas B. Robertson Surveyor of Clay
County Indiana, after ten days notice being given to
George M. Englehart Charles Englehart, John Mentz
by Alfred L. James, Corners set from 8 to 15 inclusive
August the 6th 1883. Chainmen sworn as the law requires
(There was no flagmen sworn, a chainman acted instead)
Cor. No. 8. A S. Stone Mr. 156 Ft. — 156 Feet North of Cor. No. 7
" " 9. A Flint Stone 12×8 (Red) 192 Feet 4 inches West of Cor No. 8
" " 10 A S. Stone Mr. 192 Ft. — 192 4/100 ft W. of 7 and 156 feet S. of 9.
" " 11 " " " " " 13 L. — 13 Links South of Cor. No. 7
" " 12 " " " " 32. — Set 32 rods West of Cor. No. 11